


Clip And Go Agility

Seesaw Assembly Instructions

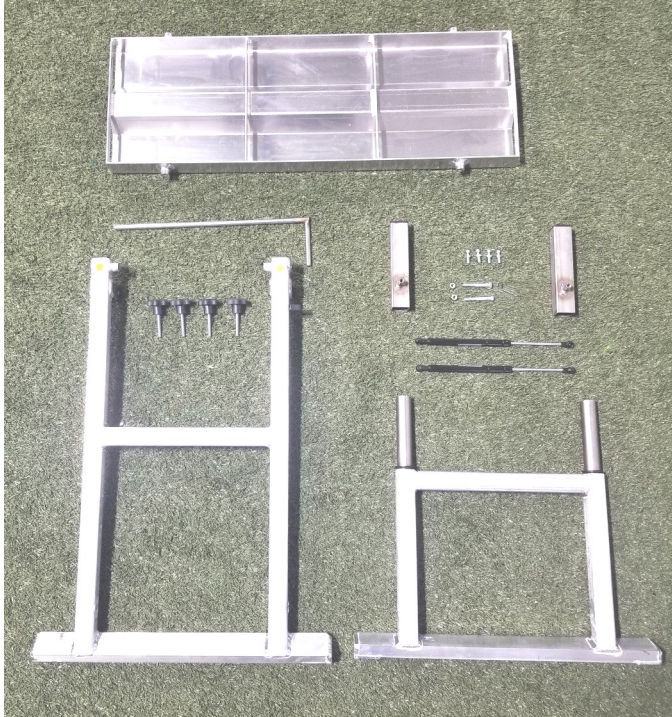

Step #1. Take inventory to verify you have all the parts for your new Seesaw

Parts list:

- (1) Large Frame
- (1) Small Frame
- (1) Sandbag Tray
- (2) Telescope Tubes
- (2) Gas Shocks
- (1) Pivot Pin

Fasteners:

- (4) Plastic Knobs for Tray
- (2) 5/16 hex bolts
- (2) 5/16 Nuts
- (4) Ball Studs

Step #2. Using a 7/16" end wrench install the four ball studs. Two in the telescoping tubes and two in the small frame.





Step #3. With a 1/2" wrench attach the telescoping tubes to the large frame using the 5/16 bolts and nuts. Note the position of the ball stud in the photo. Tighten the bolt/nut and then loosen it 1/4 turn. The telescoping tube should rotate easily.

Step #4. Slide ends of the small frame into the telescoping tubes as shown. The frame should slide in and out easily. If it does not you may need to loosen the bolts in the previous step more. Make certain the ball studs are facing downward.



Step #5. Set the base on its side and open it to the approximate size. Slide the tray into place and start two of the plastic knobs. Do not tighten them. Turn the base over and add the remaining knobs. Once all knob are started in their thread tighten them.




Grand Blanc, MI, USA ClipAndGoAgility.com



Step #6. Install each of the gas shocks. Note that the cylinder end of the shock attaches to the top tube and the rod end attaches to the frame. The socket ends simply snap over the ball studs.

Note you may need to extend or compress the cylinder to achieve the desired length. The shock may be sticky the first time you attempt to slide it. Push hard.

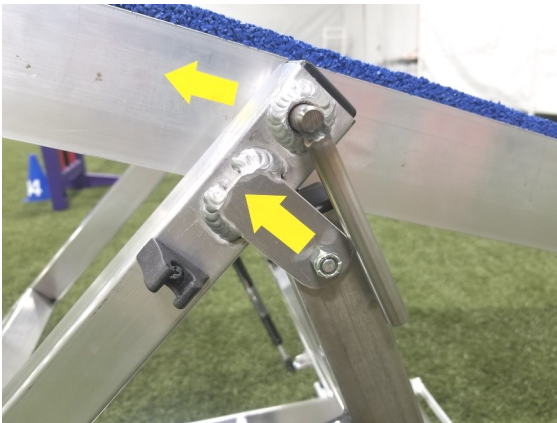

Step #7. Installing the plank. Note that the plank and base have arrows near the pivot area. These arrows indicate the direction the dog will be going when performing the obstacle. Make certain all of the arrows are pointed in the same direction, if the plank is on backwards the cylinders will not function properly.

Once the plank is properly oriented install the pivot pin and clip it into the rubber retainer located on the side of the frame.



Grand Blanc, MI, USA ClipAndGoAgility.com