



Safety First Wing Jump Assembly Instructions





- 1.) Assemble base, align the snaps on the bottom cross piece with their matching holes in the feet, press firmly to insure each snap is fully assembled

- 2.) Insert the white uprights into the base. Make certain the small holes are at the top and facing outward. Push the upright down firmly to make sure they are at the bottom of the base

- 3.) Insert plugs into the ends of each upright pipe

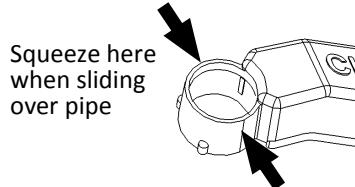


Insert black pipe here first

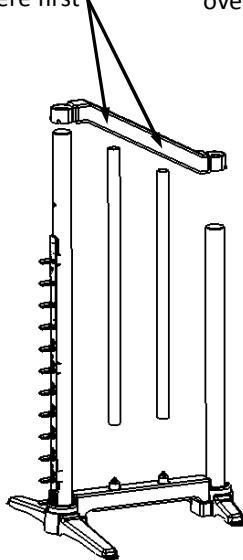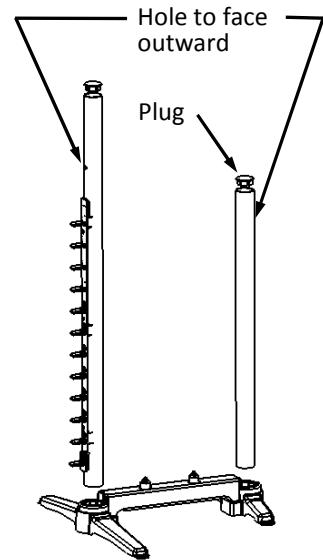

- 4.) Install the upper cross piece, squeeze the sides of the loop together as you push the cross piece over the end of the pipe.

- 5.) Once each end of the cross piece is started add the smaller black pipe by pushing them over the "x" rib on the underside of the TOP cross piece. There are two lengths of pipe, make certain the longer piece is used in the location closer to the jump cup strips.

- 6.) Once the black pipes are in position carefully slide the upper cross piece down into position. As you do this keep the black pipes aligned with the standing posts in the base. Push the cross piece down until you see that it has snapped into position.

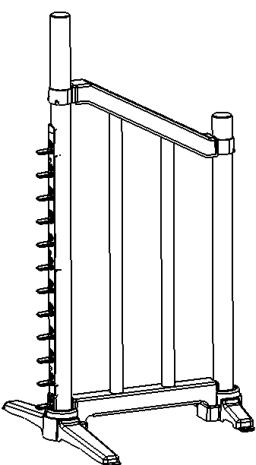

WARNING:

Exposing your jump to extreme heat may cause damage. Exposure to temperatures over 125° F may cause warping

