

Assembly instructions

Handlers Choice PVC Frame Safety Swing back Tire



Your PVC frame may be partially assembled in the carton
The product can be used without adding PVC glue (not included) if you want to be able to disassemble it for any reason
We recommend using clear glue




Step one - Add the Center base by inserting it firmly into the four way fitting in the center of the two cross Bases (forming an H shape)

Step two - insert the upright tire support poles with the measurements facing out



Step three
(add the two grey colored height locks)
Lock the height locks on the line above the desired heights example shown at 12"

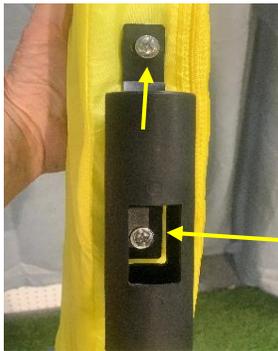

Step four
Using a phillips screwdriver (not included) fasten the black harness to the tires by screwing the bolts provided into the tire

TIP - Fastening the screw in the center hole first makes the job easier
Install the tires with the exposed harness screw facing upward

We hope you enjoy your Handlers Choice Safety Swing Back Tire