

# HANDLERS CHOICE

## Swing Back Safety Tires



can be striped or decorated using outdoor rated polyester fabric cushion paints readily available from most home centers



**HANDLERS CHOICE** safety jumps meet the requirements for most Kennel Clubs to be used in competitions


Some clubs require contrasting stripes which can be easily added using polyester paint in your choice of color

Replacement covers and other parts are available upon request

# Handlers Choice Swing Back Safety Tire Assembly Recommendations

## Component check list


- 2- PVA foam Yellow half Tires (pt1)
- 2- Aluminum upright posts (pt2)
- 2- Aluminum base post supports (pt3)
- 1- Aluminum base connector (pt4)
- 2- Plastic upright base covers (pt5)
- 2- Blue Plastic height adjusters (pt6)
- 2- Blue plastic tire brackets (pt7)
- 4- small post connector screws (pt8)
- 4- Hex head base connector screws (pt9)
- 4- Medium tire connector screws (pt10)

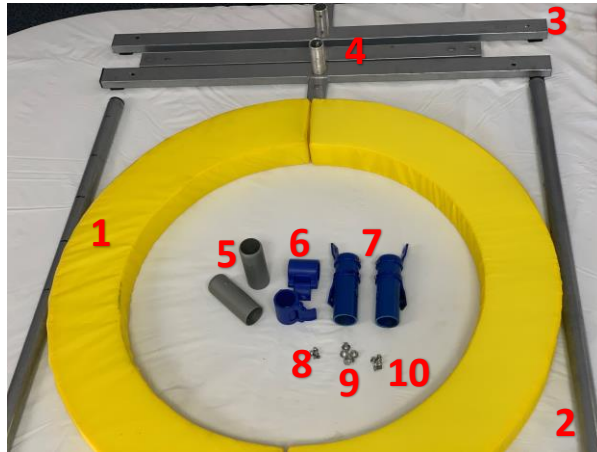

Remove contents and check to see that all of the components are present assemble the frame by fastening the base support (pt3+4) with the fasteners shown below (pt9) then attach the upright Posts(pt2) and slide on the base covers (pt5)



Next Attach the pole connectors to the foam tires using the screws provided (pt10) Attach the Connector by placing the first (pt10) screw through the hole in the connector tube and screwing into the tire. This will make it easier to line up the screw with the second hole



Attach the pole height connectors to The uprights as shown above -push in the plastic levers to lock them in position at any height

Gently slide the tires into position Above the height connector with the visible screw Positioned at the top

slide the tire to the desired height Then raise the height connector And lock it in place

Repeat this process for both sides Check that all the fasteners are secure and the unit is ready for use.